



#### Quality

The latest technology, the best materials and production controlled at every stage as well as our own research laboratories guarantee the highest quality.



#### Service

Professional and fast service is the hallmark of Drutex, which has been setting trends in pre- and post-sales customer service for years.



#### Security

Doors are equipped with reliable fittings and locks that ensure their safe use.



#### Smart Home

Intelligent control of doors, windows, roller shutters, façade blinds, mosquito nets, gates, wickets and lighting using a smartphone.



ul. Lęborska 31, 77-100 Bytów  
+48 59 822 91 01

— SINCE 1985 —

The information presented in this advertising material is for informational and illustrative purposes only. Product specifications should be subject to verification with the technical data specified by the manufacturer.





## PVC TERRACE SYSTEMS

BORN OF PASSION AND EXPERIENCE

BUSINESS PARTNER

## IGLO ENERGY CLASSIC PSK

7-chamber class A profile, made exclusively of primary material. Our proprietary system ensures optimal natural light levels for both large and small rooms, while maintaining exceptional thermal insulation properties, which will contribute to significantly lower your heating bills.

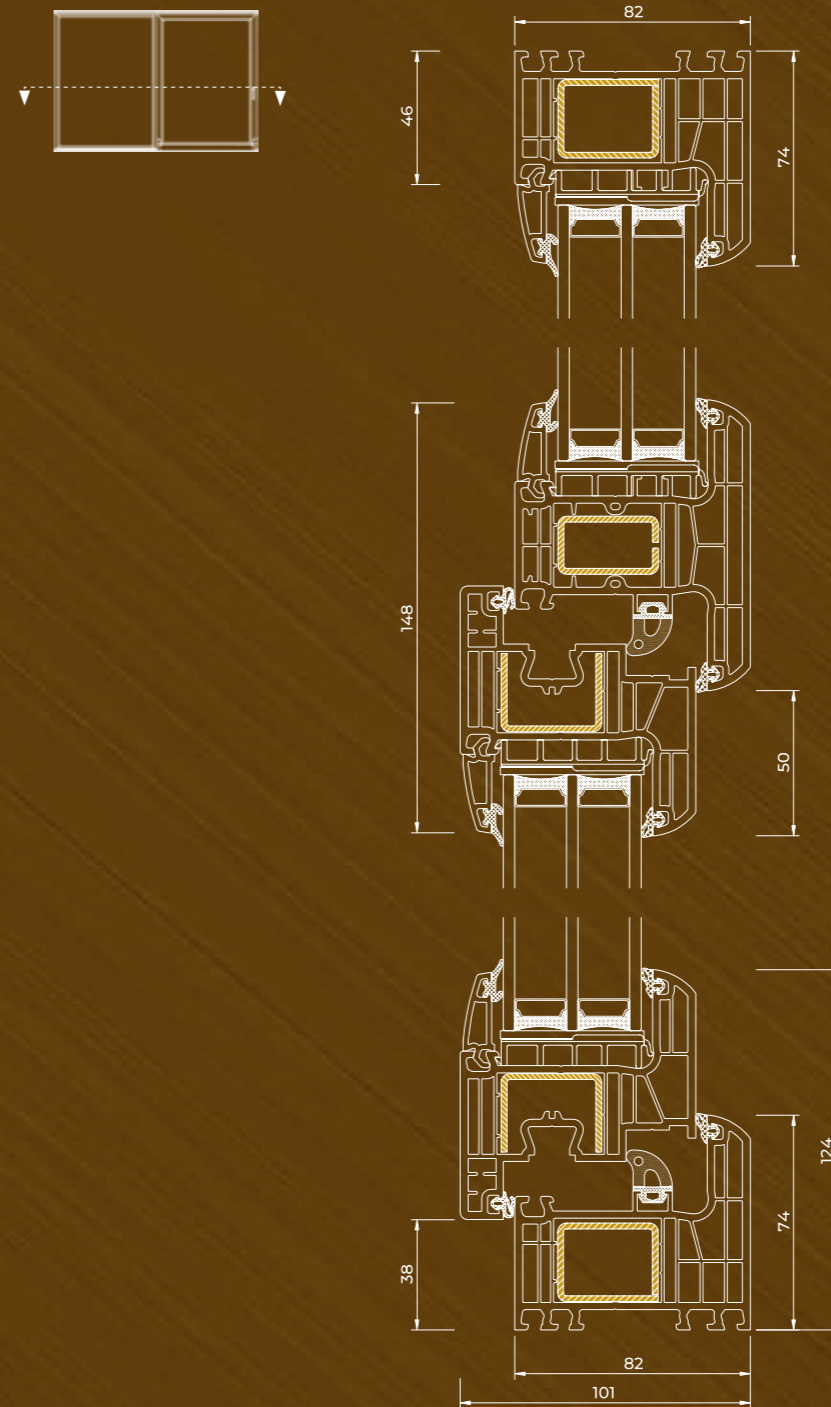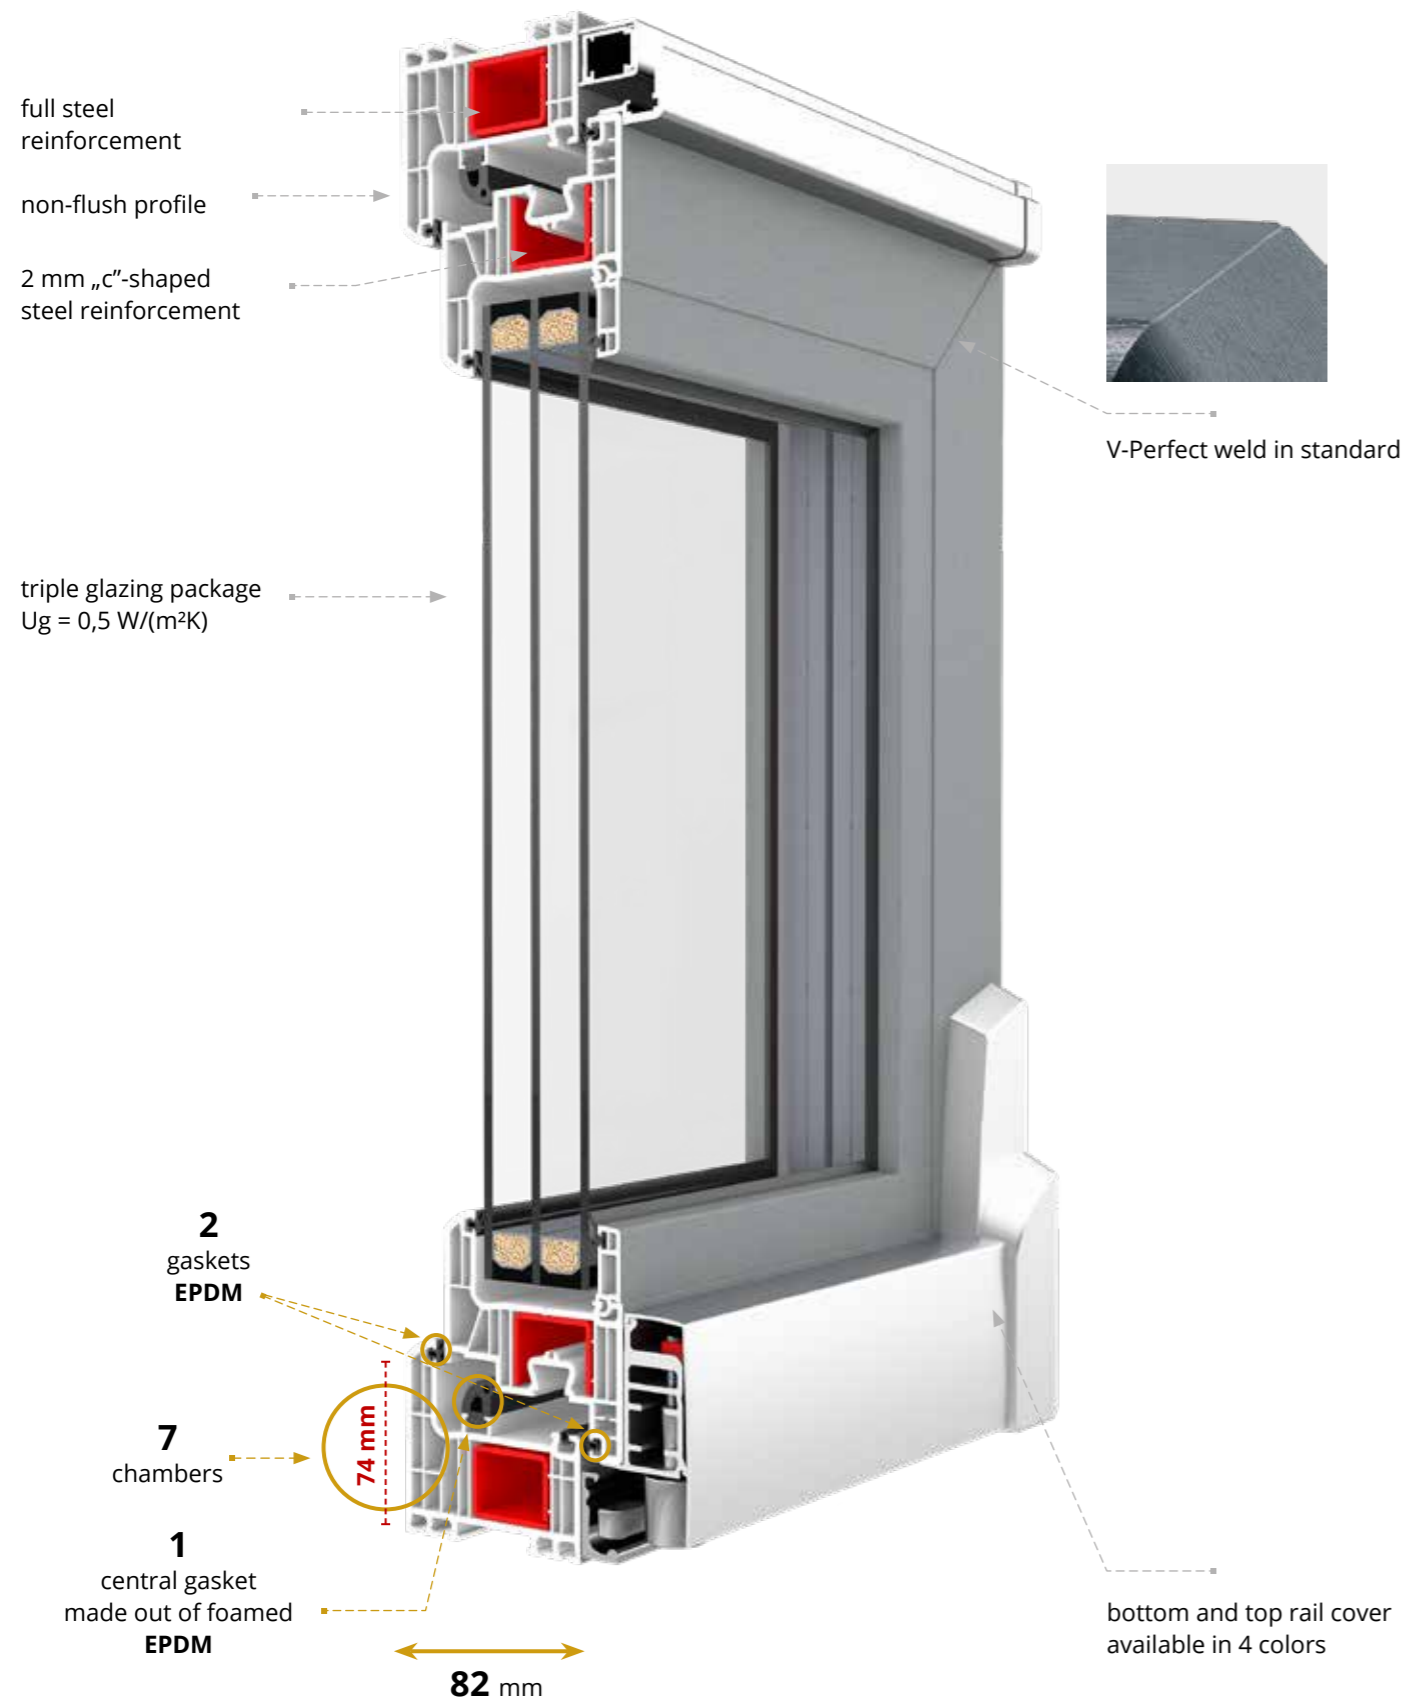

- MACO hardware designed for sashes exceeding the weight of 200kg
- 2-chamber glazing unit filled with Argon gas with Ug=0.5 W/(m²K)
- glazing packages available: 24-52 mm (48 mm - 4/18/4/18/4 by default)
- galvanized steel spacer or Swisspacer Ultimate warm plastic edge
- can be tilted for ventilation
- aluminum handle
- peripheral, glazing and central gaskets made of EPDM in black or gray colors
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracit
- seal filling the lower fitting groove
- full steel reinforcement of the door frame
- 5-chamber PVC window sill strip with seal
- V-Perfect weld as standard

## IGLO ENERGY CLASSIC PSK

**7**  
chambers

**3**  
EPDM gaskets

**82**  
installation depth  
/ mm /

**0,66\***  
Uw for Ug=0,5 W/(m²K)

\*value determined by the calculation method for structure with dimensions of 2700 x 2300 mm with glass of Ug value=0.5 W/(m²K) and Swisspacer Ultimate frame



Class profile

**A**



## IGLO EDGE SLIDE

The new terrace system with a high thermal insulation parameter of  $U_w = 0.65 \text{ W}/(\text{m}^2\text{K})^*$  and a modern, angular profile shape consistent with the Iglo Edge product line.

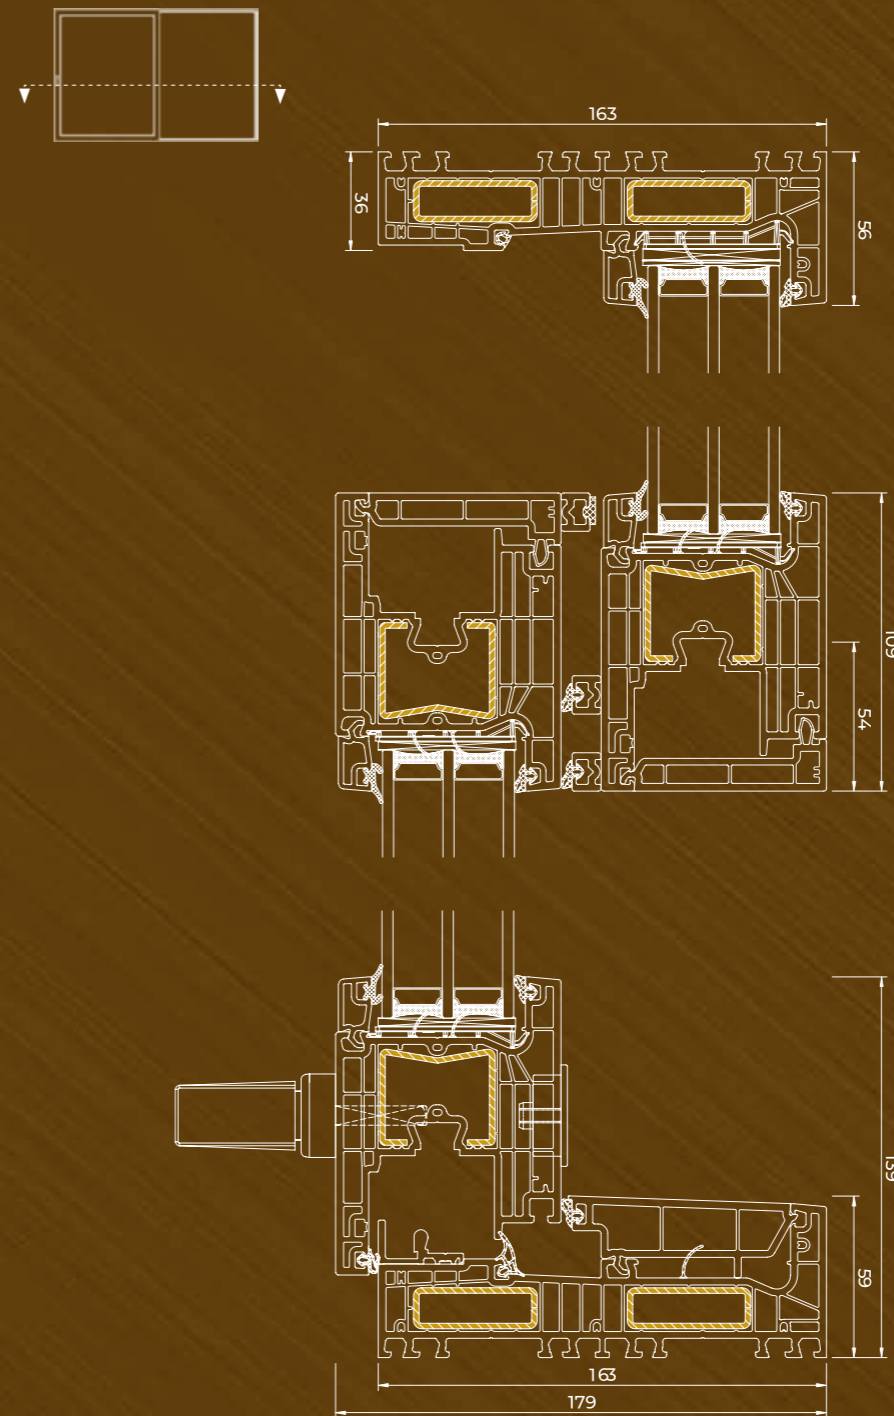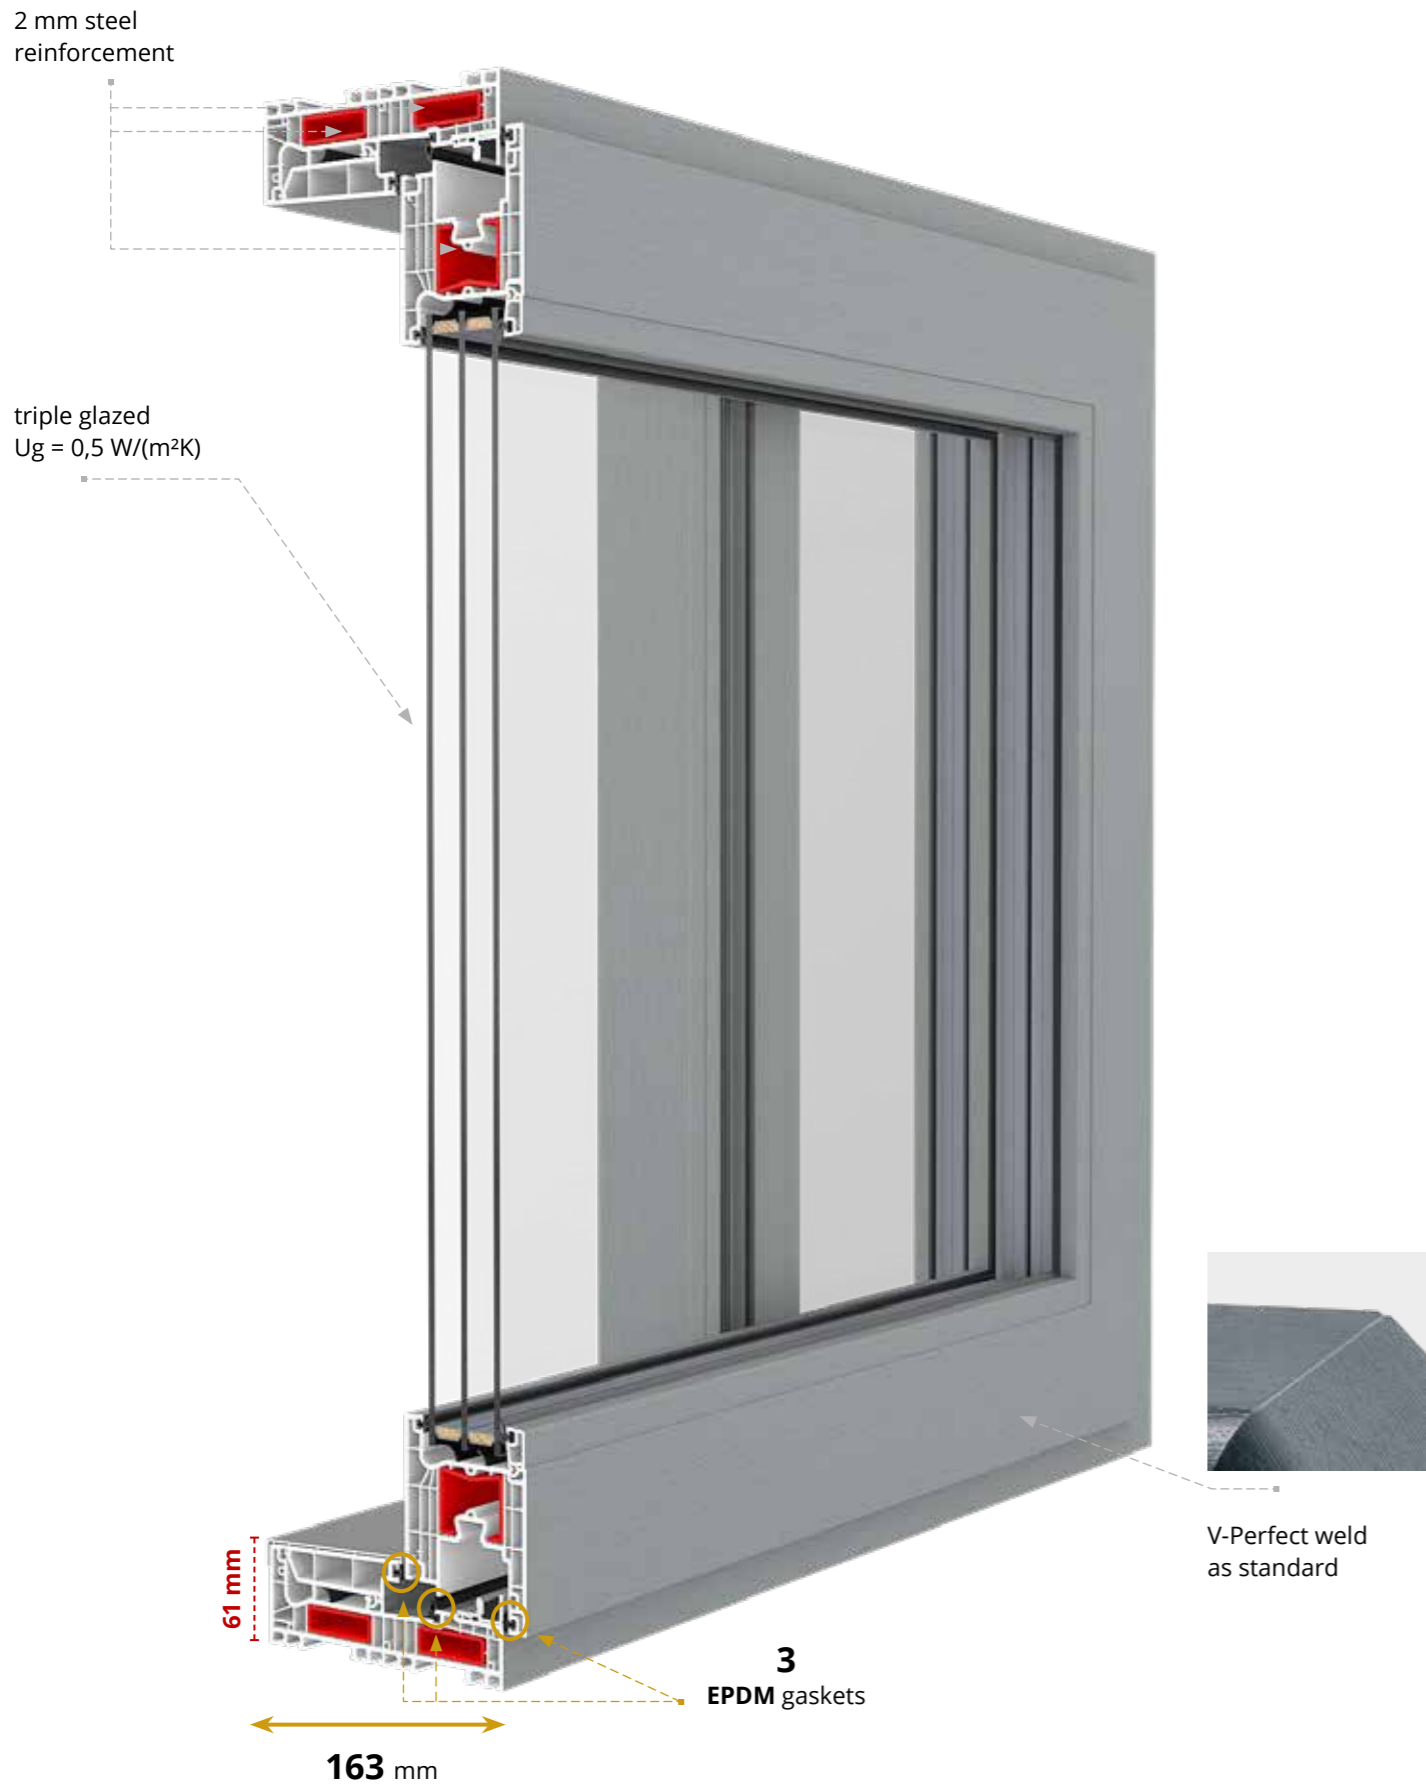

## IGLO EDGE SLIDE

**6**  
chambers

**3**  
EPDM gaskets

**163**  
installation depth  
/ mm /

**0,65\***  
 $U_w$  for  $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$

\* value determined by the calculation method for structure with dimensions of 4000 x 2600 mm with glass of  $U_g$  value=0.5  $\text{W}/(\text{m}^2\text{K})$  and Swisspacer Ultimate frame

Class profile

**A**





- SIEGENIA hardware with anti-burglary catches
- 2-chamber glazing unit filled with Argon gas with  $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$
- glazing packages available: 48-54 mm (48 mm - 4/18/4/18/4 by default)
- Swisspacer Ultimate warm plastic edge
- internal aluminum handle
- micro-ventilation
- external aluminum pull
- peripheral and glazing seals made of EPDM in black or gray
- black central gasket
- wide range of PVC veneer colors
- 3 colors of the door sash profile to choose from: white, brown or anthracite
- 2 mm steel reinforced sash and frame
- 5-chamber PVC window sill strip with a gasket
- V-Perfect weld as standard

## IGLO HS

An ideal solution for creating fashionable terraces with large glazed surfaces, which gives the interior a unique character.

Thanks to the extremely durable construction, this terrace system can be used with sashes weighing up to 400 kg. Perfect functionality is ensured by, among others: the use of a low aluminum threshold that can be hidden in the floor.

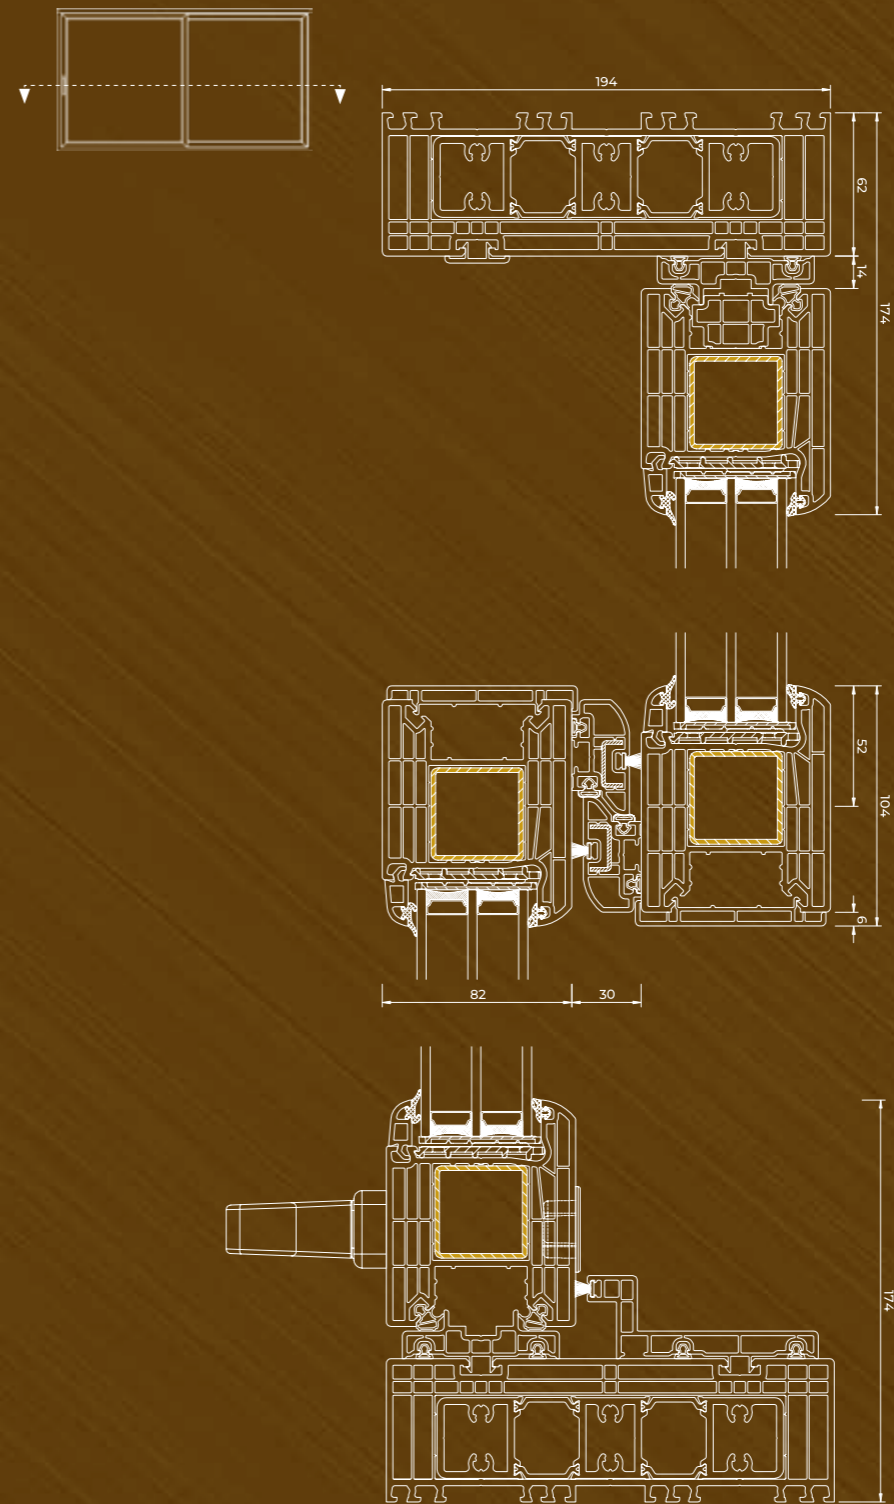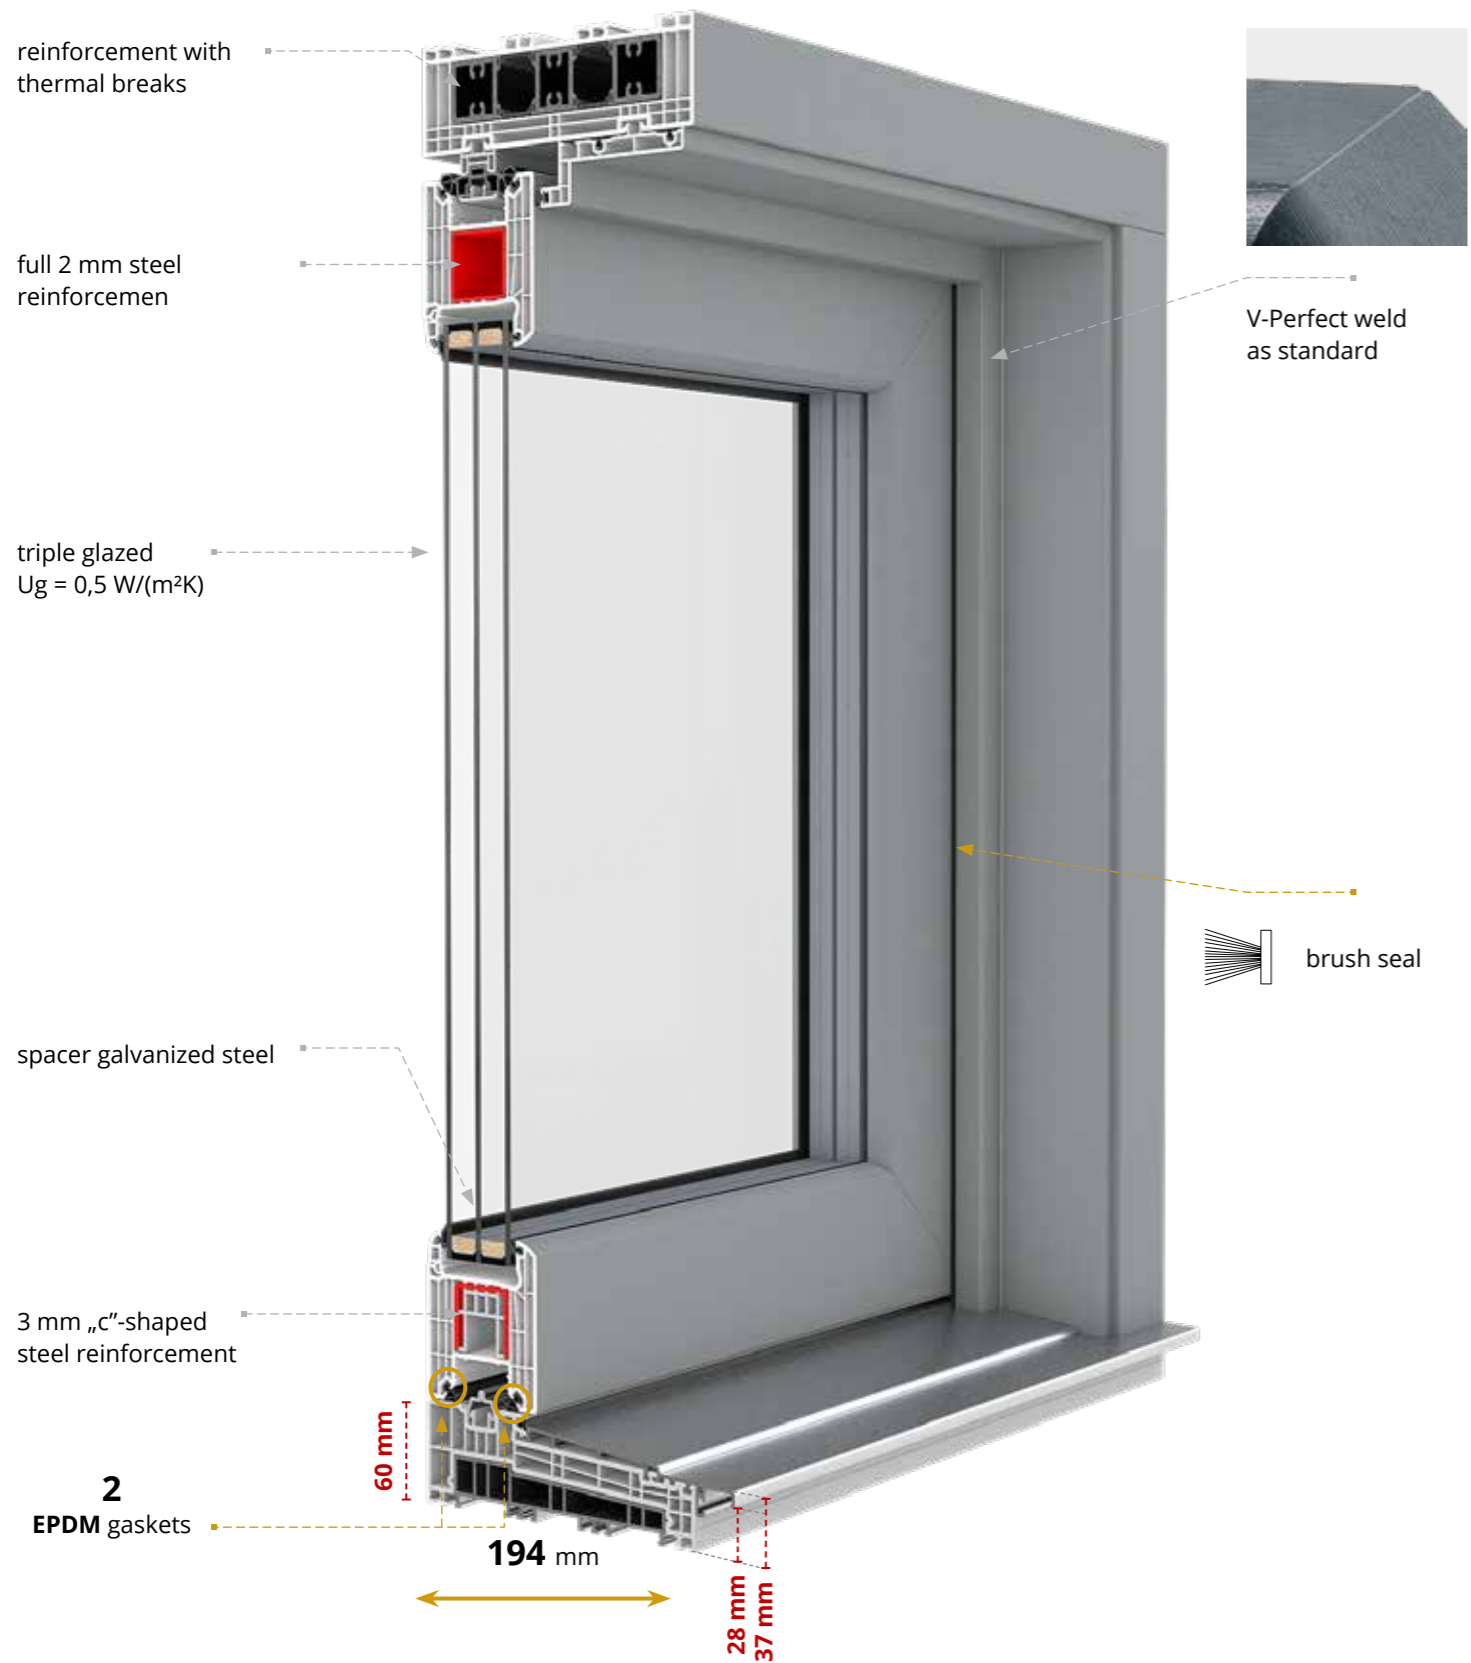

## IGLO HS

**7**  
chambers

**2**  
EPDM gaskets

**194**  
installation depth  
/ mm /

**0,71\***  
 $U_w$  for  $U_g=0,5 \text{ W}/(\text{m}^2\text{K})$

\* value determined by the calculation method for structure with dimensions of 4000 x 2600 mm with glass of  $U_g$  value=0.5  $\text{W}/(\text{m}^2\text{K})$  and Swisspacer Ultimate frame

Class profile




































**A**



- G-U lift and slide fittings, equipped with 3 locking bolts
- 2-chamber glazing unit filled with Argon gas with  $U_g=0,5\text{W}/(\text{m}^2\text{K})$
- glazing packages available: 36-52 mm (48mm - 4/18/4/18/4 by default)
- micro-ventilation hook
- V-perfect weld
- aluminum handle inside, pull handle on the outside
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- internal velour seal, external EPDM gasket and black brush seal
- frame reinforcement made of high-quality aluminum profiles with thermal breaks, sash reinforcement: upper and vertical - solid (2 mm of rectangular tube steel reinforcement, lower - 3mm channel reinforcement)
- white profile core
- low PVC threshold with reinforcement and aluminum cover

**VENEER colors**

The rich color palette of window systems allows for almost unlimited possibilities of matching the color to the personal needs and preferences of customers. The excellent quality of the veneers used during production guarantees the highest quality and durability of the color for many years.

 Concrete grey 702305-167	 Basalt grey smooth 701205-097	 Crown Platinum 9.1293001-195	 Cream 137905-167	 Quartzite grey 703905-167	 Dark red 308105-167
 Light grey 725105-167	 Anthracite Ulti-Matt 02.20.71.000001-504700	 Quartz grey smooth 703905-097	 Natural oak 3118076-167	 Oregon 2115008-167	 Palisander 851805-167
 Slate 1.0065002-097	 Slate grey smooth 02.11.71.000040-097	 Black Ulti-Matt 02.20.01.000002-504700	 Grey 715505-167	 Smooth anthracite 701605-097	 Golden oak 2178001-167
 Pyrite 02.12.17.000001	 Jet Black CC+ 476-6062	 Dark green 612505-167	 Turner oak F470-3001	 Moss green 600505-167	 FX white 915205-168
 Anthracite 701605-167	 Chocolate brown 887505-167	 Douglas fir 3152009-167	 Dark oak 2052089-167	 Macore 3162002-167	 Mahogany 2097013-167
 Basalt grey 70125-097	 Nut 2178007-167	 Sheffield oak light F 456-3081	 Winchester 49240015-148	 White sand Ulti-Matt PX 9152	

 The printout may differ from reality.

**WARM EDGE**

**SWISSPACER  
ULTIMATE**  
without surcharge



White  
RAL 9016

Light grey  
RAL 7035



Grey  
RAL 9023

Light brown  
RAL 8003



Dark brown  
RAL 8014

Black  
RAL 9005

More details  
you will find in  
our catalogue





**WINDOWS**



**ROLLER SHUTTERS,  
VENETIAN BLINDS**



**DOORS**



**FACADE,  
WINTER GARDENS**



up to **7000**  
windows daily



**4000**  
employees



**650**  
vehicles



**118 Tsd. m<sup>2</sup>**  
surface production

SINCE 1985

FAST DELIVERY TIME

